



Apeos C7070 / C6570 / C5570 / C4570 / C3570 / C3070



FUJIFILM Business Innovation Corp.

New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times.

"Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.

Apeos c7070 / C6570 / C5570 / C4570 / C3570 / C3070

Copy / Print	Scan	FAX	Printing resolution
Colour/Monochrome 70 ppm ^{*1}	Colour/Monochrome 270 ppm ^{*2}	Super G3 FAX	1200 × 2400 dpi

Cloud enabled
 Mobile enabled
 Scan business cards
 Security

• LED reminder to collect printed document / originals • Multi-feed detection

*1: For Apeos C7070

*2: When scanning using the Duplex Automatic Document Feeder C2-PC. 160 ppm when using the Duplex Automatic Document Feeder B2-PC.

FUJIFILM



Accelerate your world of remote work style

Easy-to-use and intuitive operability. From one touch mobile connection to direct access to cloud services, these seamless operations along with strong security features help you create a seamless remote work culture.



Quick and simple operability

- Easy and intuitive operation
- Fast output with no wait time



Seamless sharing and document management

- Improve daily work efficiency
- Integrate regular workflows



Easy Connectivity

 Seamless connectivity from anywhere using mobile and cloud services.



Safe guarding information

• Important information is well protected

Customer who requires

- A well-balanced multifunction printer as primary/secondary device
- A device that can assist them in developing a remote yet seamless working environment
- A device that can be used on the go with seamless connectivity options
- A device that allows convenient information sharing anytime, anywhere
- A device that allows tracking by department usage patterns for maximising work and cost efficiency



Quick and simple operability

Simple layout with easy navigation

Black and gray tone UI gives better contrast for easy recognition

- Icons are evenly spread for easy recognition
- Consistent operation steps of each function for easy recall
- Home screen personalization for ease of access to commonly used functions
- Pin regular settings for registering frequent or repeated jobs
- Clear visible light notifications for completed or
- error jobs
- Subtle sound notification for alert and attention



Light notification reminder

Light notification reminds user of uncollected original or printed document on the trays.

- Prevents uncollected documents left on the Center Tray or feeder
- Center Tray light further notifies when a fax is received on the Side Tray



Accelerated operations with no wait time

Quick startup and output for greater efficiency

- Quick warm up in less than 24 seconds
- Fast Boot Mode prepares the operation panel in 6 seconds*1
- First Copy Output Time in 3.3 seconds*2
- *1: Depending on the status of the main unit and configuration of options, it may not operate or take more than 6 seconds.
- *2: A4 LEF for C7070/C6570 when in horizontal/Monochrome preferred mode

Quick scanning of high-volume originals

Up to 270ppm* can be read at high speed in Copy or Scan. The post-processing jobs can be carried out without delay.

- Equipped with multifeed detection
- One pass DADF will not damage the original document
- The document cover closes slowly
- * For Duplex Automatic Document Feeder C2-PC.

During 1 pass and 2 sided scanning, 200 dpi to Folder.

Trays open and close lightly and quietly

Paper trays are equipped with a retraction mechanism for smooth opening and closing

- One soft push for closing
- Retracts softly and gently
- Drawing out is effortless

Apeos C5570



Seamless sharing and document management

Scan small originals such as checks and invoices together

Custom-size or small-size documents such as receipts can be scanned directly from the Duplex Automatic Document Feeder which can be automatically set into the nearest standard size.

- Instantly scan without manual entry of each original size · Automatically converts custom-size originals to standard size
- Smart OCR* function reduces post-processing work * Optional



Digitisation of paper documents for effortless document management


With Scan Delivery*, you can automatically process and store scanned images by simply pressing the preset button for each workflow or document type.

- Automate to set file format, file name, OCR, etc Automatically stores scanned and processed documents
- in the appropriate destination Specify particular words or characters in a document as
- the folder or file name 0 and other frequently mis-recognised characters can be
- read correctly
- * Optional.

Simple scanning to yourself

With ScanAuto, you can easily send scanned data with a touch of a button

- Automatically adjusts the orientation or 1-sided/2-sided of the original document
- Automatically sets user mail address as the destination by using user authentication function

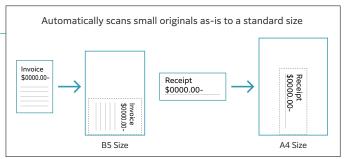

Enhance sales capabilities by utilising business card information

With Duplex Automatic Document Feeder B2-PC, you can load originals that are as small as business cards.

- Supports minimum size of 49mm(W) x 85mm(L)*1
- Multilple sheets of original can be loaded and scanned together
- 1-pass 2-sided DADF allows simultaneous front and back side scanning
- OCR*2 feature reduces workload of manual data entry *1: Applicable for paper weight 30 to 209 gsm *2 Optional Easy to scan Easy to use 2 Scan Auto-image Auto-sort & save
 A 4 Share / correction utilise QR codes and bar codes application Where QR code or bar code is available on the headsheet or content body of the original document for scanning, Scan Delivery will recognise and process the information accordingly.

Streamline operations for remote work style

Do not miss any faxes when you are working remotely


Paperless fax function automatically stores received faxes into folders which can be transferred to a PC or sent as emails

- Received faxes can be forwarded to your mobile device by email
- Received faxes can be transferred to Working Folder*1
- It can be sorted by fax number, date received, and person in charge*2
- Incoming fax processing can be switched by time, day of the week and period*2
- Can be set with one touch*2
- *1 Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.
- *2 Optional

Share information anytime, anywhere

With Working Folder* and internet access, documents can be viewed regardless of time and location.

- Can be linked smoothly with multifunction devices, DocuWorks, and mobile devices
- Documents in Working Folder can be printed from the control panel
- Scanned documents will be assigned a file name and stored in Working Folder. An email notification will be sent to relevant users



* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Print out from any multifunction device within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected multifunction devices.

- Improves productivity by printing from another available
- multifunction device when the current device is in use • Up to 100 units can be linked
- * Op to 100 units can i * Optional.

Flexibility in office layout

Supports Wireless LAN environment*.

- Supports free addressing in the office with Wi-Fi support.
- Up to five Wi-Fi Direct multifunction devices can be connected at the same time
- Supports direct mobile printing
- * Optional.

Easy and secure output even when you are working remotely


With ApeosWiz Cloud ODP*, you can register documents from a PC or mobile device to the cloud server and print them from the designated multifunction device.

- · Can be operated securely using a User ID and password
- Fear of loss or stolen data is minimised
- No dedicated driver is required
- * Cloud services provided by FUJIFILM Business Innovation.

Centralised cloud integration

ApeosWiz Cloud Hub*1 allows single sign-on to multiple cloud storage services.

- Specific storage location can be assigned for scanned documents directly from the multifunction device
- Searching documents from multiple cloud services is supported
- Full-text search on scanned documents can be performed with OCR
- $^\circ$ Streamline accounting work by linking with Concur Expense* 2



- *1: Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.
- *2: A separate contract is required.





Safeguard important information

Information is an important asset which should be protected at all cost

[Protect from unauthorised user]

User Authentication and Permissions

Unauthorised operations and access are prevented by user identification and usage restrictions.

- Local Authentication
- Authentication by Remote Server*
- IC Card Authentication*
- User-specific feature access
- Private Charge Print
- Image log*
- Print UUID
- *Optional.

Prevents unwanted access

Secondary Ethernet* Add Ethernet, separate the network *Optional.

[Protects Data]

Protection of communication data

Protects the communication data between the multifunction device and a PC or file server from eavesdropping or tampering.

- Encryption of communication paths by SSL/TLS or IPsec
- Encryption when transferring via SMBv3 and SFTP
- Scan file encryption/signature
- Email encryption and signature by S/MIME
- TLS version limit
- Elliptic curve cryptography
- WPA3

Protection of stored documents in multifunction device

Protects the data stored in the multifunction device by encryption.

- Encryption of stored data
- Uses TPM* 2.0 chip for encryption key management
- Deletes settings and document information all at once
- * Trusted Platform Module

[Protect from unauthorised access]

Protection of management function

Protects against unauthorised access to the multifunction device's management function.

- Service representative operation restriction
- Account lock to prevent unauthorised access
- Information for changing the default password
- Warnings displayed when using global IP address

Protection of multifunction device

software

Prevents the installation, execution, and operation of fraudulent software.

- Software signature verification
- Remote update restrictions
- IP address filtering
- Tampering detection at startup
- Prevention of tampering during operation
- Automatic restoration of multifunction device software
- Audit log
- Audit log system transfer

[Prevents operation errors]

Prevents settings and operation errors

Prevents information leakage due to inadvertent mistakes by administrators and users.

- Scan documents to be delivered to fixed destination
- Re-enter fax recipient
- Annotations
- Hidden text printing*
 Digital code embedding and tracking function*
- *Optional.



Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures, most problems can be resolved without waiting for the service representatives or sales representatives.

- 1. Resolve problem using the "Help" function on the device Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel



- 2. "Remote Assistance" with the help of operators
- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel



ApeosWiz Device Log*

Multifunction device usage can be tallied and viewed via Web UI.

This streamlines expense management and promotes TCO savings.

- Usage calculation can be done via the web browser
- Authentication function allows usage tracking by user level
- · Easy-to-read result tabulations in colour coded tables and charts
- Dedicated server is not required
- * Cloud services provided by FUJIFILM Business Innovation.




The device supports various paper size and thickness such as postcards, envelopes, and long paper. Promotional materials can be easily produced in-house

- Supports long paper up to 320 × 1200 mm
- Supports 52 to 300 gsm paper from lightweight cardstock paper such as certificate of commendation
- Bypass tray supports postcards and envelopes, and an optional "Envelope Tray" is available
 Note: Finisher-A2 supports C5570/C4570/C3570/C3070/C2570.



Optional

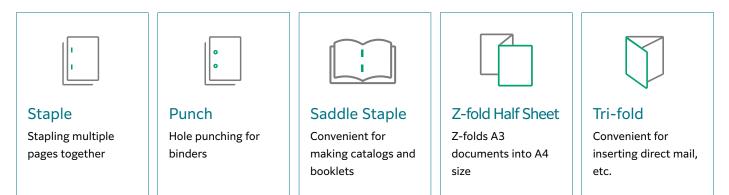

		Finisher-A2	Finisher-B4 + Booklet Maker Unit	Finisher-C4	Finisher-C4 with Booklet Maker	Finisher-C4 with Booklet Maker + Folder Unit CD3
Staple o	apacity	50 sheets*1	50 sheets	50 sheets or 65 sheets* ²	50 sheets or 65 sheets* ²	50 sheets ^{*3} or 65 sheets ^{*2*3}
Punch		-	2/4 holes or 2/3 holes* ⁴	2/4 holes or 2/3 holes* ⁵	2/4 holes or 2/3 holes* ⁵	2/4 holes or 2/3 holes* ⁵
Saddle	Staple	-	15 sheets*6	-	20 sheets	20 sheets
Single for	old	-	*6	-	•	•
Tri-fold		-	-	-	-	*7
Z-fold H	lalf Sheet	-	-	-	-	*7
Paper	Output tray	-	-	500 sheets	500 sheets	500 sheets
capacity*8	Finisher tray	500 sheets	2000 sheets	3000 sheets	1500 sheets	1500 sheets

Note : Finisher-A2 is compatible with models up to C5570 / C4570 / C3570 / C3070.

*1: A4 size. Up to 30 sheets for B4 or larger.

*2: With Finisher-C Staple Unit *3: When mixed with Z fold half sheet, the number of sheets is reduced.

- *4: Finisher-B4 requires the 2/4 Hole Punch Kit or the US 2/3 Hole Punch Kit.
- *5: One of the following is required: Finisher-C4 (2/4 Holes), Finisher-C4 with Booklet Maker (2/4 Holes), Finisher-C4 (2/3 Holes), or Finisher-C4 with Booklet Maker (2/3 Holes).

*6: Booklet Maker Unit is required. Saddle Staple and Single Fold on Finisher-B4 make creases without folding.

*7: Folder Unit CD3 is required.

*8: 70 to 80 gsm paper / A4 size.

For high volume copy, print and fax jobs

High Capacity Feeder Type

High Capacity Feeder B1 can feed 2000 sheets*1

High Capacity Feeder B2 can feed 2940 sheets $*^1$

Maximum paper capacity of 6140 sheets*² can be loaded with Tandem Tray module to support high volume printing needs.

*1: 70 to 80 gsm paper

*2: For 70 to 80 gsm paper, C7070/C6570 and High Capacity Feeder B2





High Capacity Feeder B1

High Capacity Feeder B2

Apeos C7070 / C6570 / C5570 / C4570 / C3570 / C3070 Specifications

Basic Specifications/Copy Function

Item		Description	C6570	05570	CAETO	02570	C2070
Туре		C7070 Console	C6570	C5570	C4570	C3570	C3070
Memory		4 GB (Max: 4					
	Device Capacity*	4 GB (Max. 4	(GB)				
		Full colour					
Colour Ca Scan Res							
	Resolution	600 x 600 dp		noto / Photo), 6	00 v 600 dai	(Tout (Man)	
Warm-up		[Embedded F When enable	Plug-ins / Cu	stom Services] ds or less (23 d ids or less (23 d	*2 egrees Celsi	us room tempe	rature) rature)
Recovery (Recover Sleep mo	y Time from	13 seconds of (23 degrees) room temper	or less Celsius	11 seconds or (23 degrees Ce temperature)	less Isius room	5 seconds or le (23 degrees Ce temperature)	SS
Original S	bize	Maximum of	A3, 11 x 17	', 297 x 432 mr	n for both Sh	eet and Book	
	Max	SRA3 (320 x [12 x 19" (30	450 mm), 1)5 x 483 mm	2 x 18" (305 x 4 i), 320 x 483 m	457 mm), A3 m when usin	g Bypass Tray]	
Paper Size	Min	A5, Postcard	(100 x 148	mm) [89 x 98 r	nm when usi	ng Bypass Tray]
	Image loss width* ³	Lead edge 4.	0 mm, Trail e	edge 2.0 mm, R	ight/Left edg	e 2.0 mm	
Paper	Paper Tray	52 to 300 gs	m				
Weight*4	Bypass Tray	52 to 300 gs	m				
First	B/W*5	3.3 sec.	3.3 sec.	3.7 sec.	4.4 sec.	4.9 sec.	4.9 sec.
Copy Output Time	Colour*6	4.1 sec.	4.1 sec.	5.2 sec.	5.7 sec.	6.7 sec.	6.7 sec.
	A4 LEF/ JIS B5 LEF	B/W: 70 ppm Colour:70 ppm	B/W: 65 ppm Colour:65 pp	B/W: 55 ppm m Colour:55 ppm			
Continuous	A4 / JIS B5	B/W: 50 ppm Colour:50 ppm	B/W: 47 ppm Colour:47 pp	B/W: 40 ppm m Colour:40 ppm			B/W: 23 ppm Colour:23 ppr
Copy Speed* ⁷	JIS B4	B/W: 41 ppm Colour:41 ppm	B/W: 38 ppm Colour:38 pp	B/W: 32 ppm m Colour:32 ppm			
	A3	B/W: 35 ppm Colour:35 ppm	B/W: 32 ppm Colour:32 pp	B/W: 27 ppm m Colour:27 ppm	B/W: 22 ppm Colour:22 ppr	B/W: 19 ppm n Colour:19 ppm	B/W: 17 ppm Colour:17 ppr
	Standard	4 Tray Model: 520 sheets x 4-tray + Bypass Tray 90 sheets Tandem Tray Model: 520 sheets x 2-tray + 840 sheets + 1230 sheets + Bypass Tray 90 sheets					
Paper Tray Capacity*8	Optional	High Capacit High Capacit	y Feeder B1 y Feeder B2	2000 sheets 2940 sheets			
	Max	4 Tray Model: 5110 sheets (4 Tray Model + High Capacity Feeder B2) Tandem Tray Model: 6140 sheets (Tandem Tray Model + High Capacity Feeder B2)					
Output Ti	ay Capacity*9	Upper Cente	r: 250 sheet	s (A4 LEF), Low	er Center: 2	50 sheets (A4 L	.EF)
Power Su	pply	AC220-240	V +/- 10 %, 3	L0 A, 50/60 Hz	common		
Maximun Consump		2.2 kW (AC220 2.4 kW (AC240 Sleep mode: 0.5 Ready mode: 10	V +/- 10 %) 5 W (AC230 V)	2.2 kW (AC220 2.4 kW (AC240 Sleep mode: 0.5 Ready mode: 90	V +/- 10 %) 5 W (AC230 V)	2.2 kW (AC220 2.4 kW (AC240 Sleep mode: 0.5 Ready mode: 57	V +/- 10 %) 5 W (AC230 V)
Dimensions		W 658 x D 790 ;	x H 1169 mm	4 Tray Model (D W 658 x D 720 4 Tray Model (D W 658 x D 790 Tandem Tray Mo B2-PC): W 658 x D 720 Tandem Tray Mo C2-PC): W 658 x D 790	x H 1119 mm ADF C2-PC): x H 1169 mm odel (DADF x H 1119 mm odel (DADF	W 633 x D 677 :	< H 1119 mm
Weight*1	0	156 kg		4 Tray Model (DA 129 kg 4 Tray Model (DA 146 kg Tandem Tray Mod 136 kg Tandem Tray Mod 156 kg	DF C2-PC): lel (DADF B2-PC)		

*2: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed.
*3: Up to A3 size.
*4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.
*5: A4 LEF / Monochrome priority mode.
*6: A4 LEF / Colour priority mode.
*7: The speed may be reduced due to the image quality adjustment.
*8: 80 gsm paper.
*9: 70 gsm paper.
*10: Excluding Toner Cartridge.

Duplex Automatic Document Feeder B2-PC

Item		Description	Description				
		C5570	C4570	C3570	C3070		
Original Size / Max: A3, 11 x 17"; Min: A6*1 Paper Weight 38 to 128 gsm (In Duplex: 50 to 128 gsm) *2							
Capacity*3	1	130 sheets					
Scan Speed*4	Copy (A4 LEF, Simplex)	B/W: 55 ppm Colour: 55 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm		
	Scan		ur: 80 ppm (1 pass, 2 s nt (A4 LEF), 200 dpi, to		60 ppm, Colour 160 ppm		

*1: The minimum custom size is 49 x 85 mm. *2: Custom sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm. *3: 70 gsm paper. *4: The scanning speed varies depending on the documents.

Duplex Automatic Document Feeder C2-PC

Item		Description				
		C7070	C6570	C5570	C4570	
Original Siz Paper Weig		Max: A3, 11 x 17"; Min: A6*1 38 to 200 gsm (In Duplex: 50 to 200 gsm)				
Capacity*2 250 sheets						
Scan	Copy (A4 LEF, Simplex)	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 55 ppm	B/W: 45 ppm Colour: 45 ppm	
Speed*3	Scan	B/W: 135 ppm, Colour: 135 ppm (1 pass, 2 sided scanning: B/W 270 ppm, Colour 270 ppm) [Standard Document (A4 LEF), 200 dpi, to Folder.]				
*2: 70 gsm	paper.	size is 84 x 139.7 mn ries depending on th				

Print Function

Item		Description
Туре		Built-in type
Continuo	us Print Speed*1	Same as the Basic Specifications / Copy Function
Printing Resolution	Standard	[PCL Driver] Standard: 1200 x 2400 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi
	Optional	[Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi
Page	Standard	PCL5 / PCL6
Description Language	Optional	Adobe® PostScript® 3™
	Standard	[PCL Driver] Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit)
Supported Operating	Standard	[Mac OS X Driver] macOS 11 / 10.15 / 10.14 / 10.13 / 10.12
System*2	Optional	$ \begin{array}{l} [Adobe^{\oplus} \mbox{PostScript}^{\oplus} \ 3^{\rm TM} \mbox{Driver}] \\ Windows \ 10 \ (32 \ bit / \ 64 \ bit), Windows \ 8.1 \ (32 \ bit / \ 64 \ bit), \\ Windows \ Server \ 2019 \ (64 \ bit), Windows \ Server \ 2016 \ (64 \ bit), \\ Windows \ Server \ 2012 \ R \ (64 \ bit), \\ Windows \ Server \ 2012 \ R \ (64 \ bit), \\ Windows \ Server \ 2012 \ (64 \ bit), \\ Windows \ Windows $
	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0
Interface		

*2: Please refer to our official website for the latest supported OS.

Scan Function (Optional)

Item		Description
Туре		Colour Scanner
Scan Resolution		600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed	1	Same as the Scan Speed for the Duplex Automatic Document Feeder
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
Interrace	Optional	Wireless LAN (IEEE 802.11 a / b / g / n / ac)

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17"; Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports ^{*2} (G3-3 ports)

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.
*2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

High Capacity Feeder B1 (Optional)

Item	Description	
Paper Size	A4 LEF, Letter LEF, JIS B5 LEF	
Paper Weight	55 to 216 gsm	
Feeding Capacity / Number of Tray*	2000 sheets x 1-tray	
Dimensions	W 389 x D 614 x H 380 mm	
Weight	29 kg	
*: 80 gsm paper.		

High Capacity Feeder B2 (Optional)

Item	Description	
Paper Size	A4 LEF, Letter LEF, JIS B5 LEF	
Paper Weight	55 to 216 gsm	
Feeding Capacity / Number of Tray*	2940 sheets x 1-tray	
Dimensions	W 476 x D 618 x H 433 mm	
Weight	31 kg	
*: 80 gsm paper.		

Side Trav

ltem	Description
Paper Capacity*	100 sheets
Dimensions	W 327 x D 414 x H 179 mm
*: 70 gsm paper.	

Finisher-A2 (Optional)

Item		Description		
Туре		Sort (Offset available*1) / Stack (Offset available*1)		
Paper Size		Max: A3, 11 x 17"; Min: A5, Postcard (100 x 148 mm)		
Paper Weight*2		52 to 256 gsm		
Paper Capacity*3 Finishing Tray		[Without Stapling] A4 LEF: 500 sheets, JIS B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking ⁴⁴ : 250 sheets [With Stapling] 30 sets, or A4 LEF: 500 sheets, JIS B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking ⁴⁴ : 250 sheets		
	Capacity	A4: 50 sheets (90 gsm or less), JIS B4 or larger: 30 sheets (90 gsm or less)		
Charle	Paper Size*5	Max: A3, 11 x 17"; Min: JIS B5 LEF		
Staple	Paper Weight	52 to 256 gsm		
	Position	Single stapling, Dual stapling		
Dimensi	ons / Weight	W 478 x D 461 x H 238 mm, 11 kg		
*1: [No Of	fset] is selected by nents may not be pr	Illed on C7070 / C6570. factory default. The settings can be changed according to the customer's use situation. inted correctly depending on usage conditions. (52 to 55 gsm)		

*4: When larger size sheets are stacked on top of smaller size sheets: 250 sheets (when large size sheets are smaller than A3) / 200 sheets (when large size sheets are A3 or larger) The same applies to when staple-free and stapled bindings are mixed or different stapling positions are mixed.

*5: Available staple positions vary depending on the paper size

Finisher-B4 (Optional)

Item		Description
Туре		Sort (Offset available*1*2) / Stack (Offset available*1*2)
Paper Size*3		Max: A3, 11 x 17"; Min: A5
Paper Weight*4		52 to 300 gsm
Paper Capacity*5		[Without Stapling] A4: 2000 sheets, JIS B4 or larger: 1000 sheets, Mixed Size Stacking*6 300 sheets [With Stapling] A4: 100 sets or 1000 sheets ^{*7} , JIS B4 or larger: 75 sets or 750 sheets [With Booklet Finishing* ⁶] 50 sets or 600 sheets [With Fold* ⁸] 500 sheets
Staple	Capacity	50 sheets (90 gsm or less)
	Paper Size*9	Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight	52 to 256 gsm
	Position	Single stapling, Dual stapling
	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
Punch*10	Paper Size*11	Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight	52 to 220 gsm
Booklet Finishing* ⁸	Capacity	Saddle Staple: 15 sheets; Single Fold: 5 sheets
	Paper Size	Max: A3, 11 x 17"; Min: A4, Letter
	Paper Weight	Saddle Staple: 64 to 80 gsm*12, Single Fold: 64 to 105 gsm
Dimensions*13		W 592 x D 653 x H 1041 mm, With Booklet Maker Unit: W 592 x D 673 x H 1076 mm
Weight		27 kg, With Booklet Maker Unit: 37 kg
*2: Output *3: Paper i	s whose weight is 2 n the sizes larger th ents may not be pr	disabled by factory default. The setting can be changed as necessary. 27 gsm and more or width is less than 210 mm are delivered without offset stacking, and 30 r11 x 17° or smaller than A5 are delivered to the Centre Tray. inted correctly depending on usage conditions. (52 to 55 gsm, 257 gsm and more)

*4: Occurrents may not be printed correctly depending on usage conditions. (52 to 55 gsm, 257 gsm and more)
*5: 70 gsm paper.
*6: When larger size sheets are stacked on top of smaller size sheets.
*7: 75 sets or 750 sheets with dual stapling.
*8: The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B. Make a crease allows you to fold easily. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.
*9: Available trapple positions stary depending on the paper size.
*10: The Punch function requires the optional 2/4 Hole Punch Kit for Finisher-B or US 2/3 Hole Punch Kit for Finisher-B.
*11: Available number of punch holes varies depending on the paper size.
*12: Covers can be up to 220 gsm (Extar Heavyweight).
*13: Inner connector within the body is excluded.

Finisher-C4 / Finisher-C4 with Booklet Maker (Optional)

ltem		Description		
		Finisher-C4	Finisher-C4 with Booklet Maker	
Туре	Output Tray	Sort (Offset available) / Stack (Offset availab	ble)	
	Finishing Tray	Sort (Offset available) / Stack (Offset available)		
	Booklet Tray	-	Sort / Stack	
Paper Size	Output Tray	Max: 12 x 19" (305 x 483 mm), A3; Min: A6	5, Postcard (100 x 148 mm)	
	Finishing Tray	Max: 12 x 19" (305 x 483 mm), A3; Min: A5 LEF		
Paper Weight	Output Tray	52 to 300 gsm*1		
	Finishing Tray	52 to 300 gsm*1		
	Output Tray	500 sheets (A4)		
Paper Capaci- ty* ²	Finishing Tray	[Without Stapling] A4: 3000 sheets, JIS B4 or larger: 1500 sheets, A5 LEF: 1000 sheets, Mixed Size Stacking ^{4,3} : 300 sheets [With Stapling] A4: 200 sets or 3000 sheets JIS B4 or larger: 100 sets or 1500 sheets A5 LEF: 100 sets or 1000 sheets Mixed Size Stacking ^{4,3} : 70 sets or 200 sheets	[Without Stapling] A4: 1500 sheets, JIS B4 or larger: 1500 sheets, A5 LEF: 1000 sheets, Mixed Size Stacking ⁴³ : 300 sheets [With Stapling] A4: 200 sets or 1500 sheets JIS B4 or larger: 100 sets or 1500 sheets A5 LEF: 100 sets or 1000 sheets Mixed Size Stacking ⁴³ : 70 sets or 200 sheets	
	Booklet Tray	-	20 sets*4	
	Capacity	50 sheets (90 gsm or less)*5		
	Paper Size*6	Max: A3, 11 x 17"; Min: A5 LEF		
Staple	Paper Weight	52 to 300 gsm		
	Position	Single stapling, Dual stapling		
	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole pu	nch (US Specifications)	
Punch*7	Paper Size*8	Max: A3, 11 x 17"; Min: A5 LEF		
	Paper Weight	52 to 220 gsm		
Booklet Finishing	Capacity*9	-	Saddle Staple: 20 sheets (90 gsm or less) Single Fold: 5 sheets (90 gsm or less)	
	Paper Size	-	Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3; Min: JIS B5	
	Paper Weight	-	Saddle Staple: 60 to 300 gsm Single Fold: 60 to 300 gsm	
Dimensions*10		W 644 x D 692 x H 1054 mm When Folder Unit CD3 is installed: W 883 x D 692 x H 1054 mm	W 649 x D 692 x H 1054 mm When Folder Unit CD3 is installed: W 888 D 692 x H 1054 mm	
Weight		36 kg When Folder Unit CD3 is installed: 88 kg	49 kg When Folder Unit CD3 is installed: 101 kg	

Note: Transport Unit H4 is required. *1: 52 to 55 gam output paper may not be aligned properly depending on the paper type. *2: 70 gam paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: When the output paper size is the same. *5: Up to 65 sheets can be stapled when the Finisher-C Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur. *6: Available staple positions vary depending on the paper size.

*7: Optional.

*1. Optional.
 *3: Available number of punch holes varies depending on the paper size.
 *9: The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper.
 *10: Inner connector within the body is excluded.

Folder Unit CD3 (Optional)

Item		Description
Z Fold Half Sheet	Paper Size	A3, 11 x 17", JIS B4
	Paper Weight	60 to 90 gsm
	Paper Size	A4, Letter
Tri-fold	Paper Weight	60 to 90 gsm
	Paper Capacity*1	40 sheets
Power Supply*2 / Maximum Power Consumption		AC220-240 V +/- 10 %, 0.6 A, 50/60 Hz common, 144 W
Dimensions		W 232 x D 588 x H 991 mm
Weight		52 kg
*1: 70 gsm pa	per.	/ Finisher-C4 with Booklet Maker.

*2: Power supply separate from the main unit is required.

Envelope Tray (Optional)

ltem	Description	
Paper Size	DL LEF, ISO-C4, ISO-C5 LEF, ISO-C6 LEF, Commercial #10 LEF, Monarch7.3/4 LEF Custom size: 241 x 372 mm to 90 x 98 mm	
Paper Weight	Envelope: 75 to 90 gsm, Postcard: 106 to 220 gsm	
Feeding Capacity / Number of Tray*	50 sheets x 1-tray	
Dimensions	[C7070 / C6570 / C5570 / C4570] : W 620 x D 566 x H 87 mm [C3570 / C3070] : W 595 x D 566 x H 87 mm	
Weight	3 kg	

*: Commercial #10 paper

Notes

1) To comply with paper weight specifications, it is recommended to use our recommended paper.

Document may not be printed correctly depending on usage conditions. 2) Functional spare parts will be available for at least 7 years after the product is no longer

manufactured.

Enhanced basic functions

Copy

- Output Colour
- Paper Supply
- Reduce/Enlarge
- Auto 2 Sided Output
- Pages per Side
- Copy Output
- Single Colour / Dual Colour Copy
- Copy (ID Card)
- Slight Reduction
- Mixed Size Originals
- **Original Size**
- Image Enhancement
- Book Copying / 2 Sided Book Copying
- Edge Erase
- Image Shift
- Mirror Image / Negative Image
- Image Rotation
- Booklet Creation
- Covers
- Poster
- Repeat Image
- Annotations
- Watermark(optional)
- Preset Repeat Image
- Delete Outside / Delete Inside
- Staple / Hole Punch / Folding (optional)

Print

- PCL
- PostScript (optional) Multi-Model Print
- Driver 2
- Secure Print
- Sample Set
- **Delayed Print**
- Print from Folder
- Form Registration
- Print Covers / Separators
- **Poster Printing**
- Booklet Printing
- Print from USB (optional)
- Staple / Hole Punch / Folding (optional)
- Long Paper Printing
- Envelope printing
- Private Charge Print
- Charge Print
- Print-On-Demand
- (optional)
- Select ID and Print (optional)

- Fax (Optional) • G3 × maximum 3 ports
- (optional) Internet Fax
- SIP Fax (optional)
- Send Direct Fax
- Address Book (maximum
- 5000 entries) Broadcast Transmission /
- Group Transmission Redial / Resend Unsent
- Documents
- Rotate 90 Degrees
- Preview 2 Sided Scanning
- Resolution / Lighten / Darken
- **Original Type**
- Mixed Size Originals
- Transmission Header Text
- Priority Send / Delay
- Start
- Cover Page
- Remote Folder
- **Transmission Report**
- Activity Report
- Re-enter Recipient Prevents Unsolicited
- Faxes
- Prohibit Direct Fax
- Receive Paperless Fax
- Simple Image Log Support
- Paperless Fax Delivery (optional)
- Remote Authentication (optional) Azure AD linked authenti-

Local Authentication

Job Flow Sheets

Scan

SFTP

Email

Scan (URL)

ScanAuto

PDF/XDW)

al)

Others

Preview

Scan to Folder

Transfer via SMB/FTP/

Scan to USB (optional)

Simultaneous transmis-

sion such as Email /

Transfer via SMB, etc.

Scan to Desktop

Colour Scanning

2 Sided Scanning

Mixed Size Originals File Format (TIFF/JPEG/

Microsoft Excel/Word format (optional) Single File for Each Page

High Compression

Speed) (optional)

Security/Encryption

High Compression (High

Searchable Text (option-

Scan Delivery (optional)

- cation (optional)
- Serverless Authentication (optional)
- Secondary Ethernet (optional)
- Wi-Fi Support (optional)
- Data Encryption
- Data Overwrite (optional)
- Secure Watermark
- (optional)
- Image Log (optional)

FUJ!FILM

The available model varies depending on the country/region. Please ask the sales representatives for details

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : - Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. - Unused postage stamps, post cards, etc. - Certificate stamps sipulated by law. - Reproducing works forming the subject matter of copyright [literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks - FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. - Apeos, ApeosWiz, Working Folder is registered trademarks or trademarks of FUJIFILM Business innovation Corp. - Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. - Alpred, AirPrint and Mac are trademarks of Apple Inc. registered in the US, and other countries. - Alproduct names and company names mentioned in this backhurs are badre wide screeting of the advanced for the trademarks of Apple Inc. registered in the US. and other countries. - Alproduct names and company names mentioned in this backhurs are badre wide screeting of the advanced for the interaction company. brochure are trademarks or registered trademarks of their respective companies



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.



50 Scott Street, Bungalow QLD 4870

Email. sales@fxcairns.com.au

Tel. (07) 40447900