

# Newline Q+ Series

A powerful all-rounder for seamless, next-generation communication.




# Newline Q+ Series

## Engagement without limitations

Welcome to uncluttered. Welcome to efficiency. Welcome to your new collaboration all-rounder.

The Newline Q+ incorporates two-way broadcast communication using an open platform, with an inbuilt camera, microphone array, speakers, PC, and touchscreen 'whiteboard' capabilities - with only one cable required.

With compelling graphic and interactive abilities, full sharing and control capabilities, and safety features like blue light filters, optical bonding, and microbial certification - the Newline Q+ is a **powerful all-rounder for seamless, next-generation communication.**



1080P built in camera

8m pick-up range microphone built in

2 x 20W speaker + 1 x 15W sub woofer

Available in 65", 75" and 86"

Wireless casting

Android 11 OS and WIFI 6 certified

Blue light filter

4K resolution and 178° viewing angle


TÜV-certified antimicrobial display coating

Compatible with Zoom, Teams, Google, and Webex

Intelligent IR touch technology

Optical bonding technology

With a wide choice of sizes and plug 'n play versatility – choose the model to best suit your needs

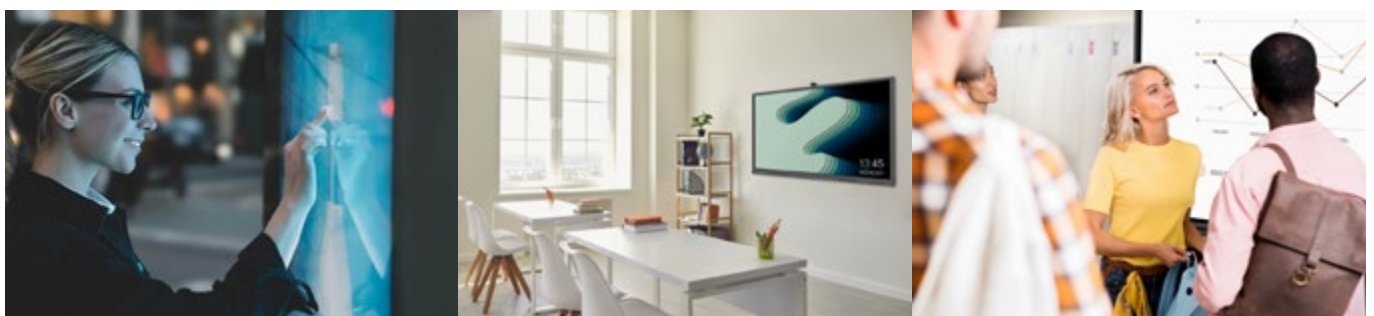

Boardroom | Meeting room | Classroom | Signage | Examination room

Simply a powerful all-rounder collaborative device.



### The power of all-in-one.

Simplify and streamline by consolidating traditional communication devices into an all-in-one setup. Say goodbye to projectors, microphones, cameras, interactive whiteboards, PC's, speakers, trailing cables, and technical interruptions. The Newline Q+ can also be mobile or fixed in place, thanks to wireless connectivity.



### Health and safety comes first.

Newline Q+ has a TÜV-certified antimicrobial coating, a physical blue-light filter, and optical bonding. This means your display is light but sturdy, safer than non-bonded touchscreens, with improved viewing angles and touch accuracy.



### Collaboration made easy.

Take charge with simple, intuitive controls – no need to have a technical expert in the room, with wireless plug 'n' play versatility. You can change presenters at will, make changes using the interactive touch screen, and see and hear everyone in the meeting with wide-view 4K clarity and powerful 2-way sound quality.



### Keep your information safe and feel supported.

The Newline Q+ has multiple security defences and settings like a USB lock, profile passkey, meeting data administrative protection, plus Android 11 OS and WIFI 6 certification. With easy web-based device management and the FUJIFILM Business Innovation Australia customer service advantage – be assured that support is available wherever you are, should you need it.



### Almost limitless capabilities.

Compatible with Zoom, Teams, Google, Webex, and more. You can also access a broad range of apps with Android connectivity to encourage engagement and problem-solving for any audience.

## Product Specifications

### Newline Q+ Series

| Series   | Q+ Series  |  |  |
|--|--|--|--|
| Model  | TT-6522Q   | TT-7522Q   | TT-8622Q   |
| Active Screen Size                                       | 65"  | 75"  | 86"  |
| Display Ratio  | 16:9   | 16:9   | 16:9   |
| Resolution   | 3840 x 2160 (4K)   | 3840 x 2160 (4K)   | 3840 x 2160 (4K)   |
| Center brightness  | 400 cd/m <sup>2</sup>  | 400 cd/m <sup>2</sup>                                      | 400 cd/m <sup>2</sup>                                      |
| Response Time  | Typ. 8ms, Max. 10ms  | Typ. 8ms, Max. 10ms  | Typ. 8ms, Max. 10ms  |
| Viewing Angle  | H = 178, V = 178 typ.  | H = 178, V = 178 typ.                                      | H = 178, V = 178 typ.                                      |
| Display Life Time (MTBF)                                 | ≥50000 hours   | ≥50000 hours   | ≥50000 hours   |
| <b>Power</b>   |  |  |  |
| Working Voltage  | AC100-240V Max 5.7A  | AC100-240V Max 6.5A  | AC100-240V Max 6.7A  |
| Power Consumption (Eco mode)                             | <150W  | <240W  | <270W  |
| Power Consumption ( full load)                           | <=570W   | <=650W   | <=670W   |
| Power Consumption (Standby mode)                         | <0.5W  | <0.5W  | <0.5W  |
| <b>Touch Technology</b>                                  |  |  |  |
| Touch Solution   | IR   | IR   | IR   |
| Glass Surface Technology                                 | Anti-Glare, Anti-Fingerprint, Antimicrobial Tempered Glass   | Anti-Glare+Anti-Fingerprint, +Antimicrobial Tempered Glass | Anti-Glare+Anti-Fingerprint, +Antimicrobial Tempered Glass |
| Touch Points   | 20 Point   | 20 Point   | 20 Point   |
| Gap in Glass and OC                                      | Optical Bonding (Gap: 1mm)   | Optical Bonding (Gap: 1mm)                                 | Optical Bonding (Gap: 1mm)                                 |
| Touch Screen Writing Tools                               | Stylus or Finger   | Stylus or Finger   | Stylus or Finger   |
| <b>Sound</b>   |  |  |  |
| Speaker Position   | bottom front   | bottom front   | bottom front   |
| Speaker Max. Power Output                                | 20Wx2  | 20Wx2  | 20Wx2  |
| Woofers Position   | back center  | back center  | back center  |
| Woofers Max. Power Output                                | 15Wx1  | 15Wx1  | 15Wx1  |
| <b>Microphone</b>  |  |  |  |
| Mic Position   | 8-mic array - upper front  | 8-mic array - upper front                                  | 8-mic array - upper front                                  |
| Distance   | 8m   | 8m   | 8m   |
| <b>Camera Module</b>                                     |  |  |  |
| Camera Resolution  | 4K@ 30 Hz /UHD   | 4K@ 30 Hz /UHD   | 4K@ 30 Hz /UHD   |
| Field of View  | 120° FOV Lenses  | 120° FOV Lenses  | 120° FOV Lenses  |
| RGB Camera   | 3840 x 2160/30fps  | 3840 x 2160/30fps  | 3840 x 2160/30fps  |
| Camera Tilt Range  | 15°  | 15°  | 15°  |
| <b>Wifi Module</b>                                       |  |  |  |
| Parameters   | wifi 6 +BT 5.2   | wifi 6 +BT 5.2   | wifi 6 +BT 5.2   |
| <b>Transportation / Storage</b>                          |  |  |  |
| Storage Temperature/Humidity                             | -20~60°C, 0~90%RH (non-condensing)   | -20~60°C, 0~90%RH (non-condensing)                         | -20~60°C, 0~90%RH (non-condensing)                         |
| Working Temperature/Humidity                             | 0~40°C, 20~80%RH (non-condensing)  | 0~40°C, 20~80%RH (non-condensing)                          | 0~40°C, 20~80%RH (non-condensing)                          |
| Installation Method (optional)                           | wall-mounted / mobile stand  | wall-mounted / mobile stand                                | wall-mounted / mobile stand                                |
| Outline Dimension (without wall mount bracket thickness) | 1513 x 926 x 116 mm  | 1735 x 1050 x 116 mm                                       | 1981 x 1190 x 116 mm                                       |
| Packing Dimension  | 1640 x 207 x 1036 mm   | 1859 x 227 x 1160 mm                                       | 2119 x 250 x 1290 mm                                       |
| Net Weight   | 39 kg  | 50 kg  | 65 kg  |
| Gross Weight   | 49 kg  | 64 kg  | 82.5 kg  |
| <b>Smart System</b>                                      |  |  |  |
| SoC Chipset  | Amlogic 311D2  | Amlogic 311D2  | Amlogic 311D2  |
| RAM  | 8GB  | 8GB  | 8GB  |
| Flash Memory   | 64GB   | 64GB   | 64GB   |
| Extra Memory (Built in)                                  | 64GB (SD Card)   | 64GB (SD Card)   | 64GB (SD Card)   |
| Android Version  | Android 11   | Android 11   | Android 11   |
| Multimedia File Formats Support                          | Image: JPEG, BMP, PNG<br>Video: MPEG1, MPEG2, MPEG4, SorensonH.263,H.263,H.264,HEVC/H.265,MVC,AVS,AVS+,WMV3,VC1, Motion JPEG,VP8,VP9,RV30/RV40<br>Audio: MPEG1/2 @LAYER1;@LAYER2;@LAYER3,EAC3,ACC-LC,HEAAC,VORBIS,LPCM,IMA-ADPCM,MS-ADPCM,G711 A/MU-LAW,LBR(COOK),FLAC |  |  |
| Proximity Sensor   | 2  | 2  | 2  |
| <b>Connectivity</b>                                      |  |  |  |
| USB Data Ports   | 1 x USB Type-C (PD 100W), 1 x USB 3.0 Type-C (No PD), 4 x USB Type-B (Touch), 3 x USB 3.0 Type-A, 1 x USB 3.0 Type-A to Android  |  |  |
| Digital Audio-Video Inputs                               | 3 x HDMI In 2.0, 1 x DisplayPort 1.2, 1 x Microphone In  |  |  |
| Digital Audio-Video Outputs                              | 1 x HDMI Out 2.0, 1 x Audio Line Out, 1 x S/PDIF   |  |  |
| Integrated PC Slot                                       | 1 x OPS-PC Slot, 1 x SDM-S Slot  |  |  |
| Control Input  | 1 x RS-232   |  |  |
| Network  | 1 x In & 1 x Out RJ-45 Connector   |  |  |
| Proximity Sensor   | 2  |  |  |
| Wi-Fi Module Slot  | 1  |  |  |

fxcairns.com.au

**FUJIFILM**



For more information or detailed product specification, please call or visit us at  
**50 Scott Street, Cairns Q 4870 Australia.**  
**Tel.+61 7 4044 7900 | www.fxcairns.com.au/meeting-room-solutions/**

Business Technologies